


Installation of Double Check Valve Assembly Backflow Preventer

Though double check valve assemblies can be installed above ground these backflow preventers are also readily adaptable for vault installations. Special notice should be given to the side clearances for accessibility to properly test and repair the device. NOTE SIDE CLEARANCES

UNDERGROUND VAULT INSTALLATION


Vaults will be constructed in compliance with standard Water Department Specifications for meter pits of the same size.

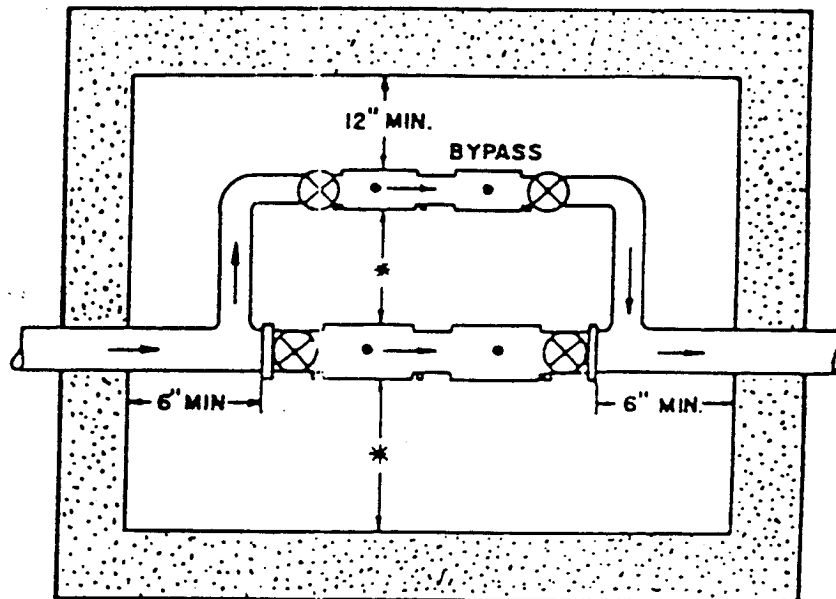

* NOTE-CLEARANCES ON TEST COCK SIDE OF DEVICE

3/4" THRU 2" 12"

3" AND UP 24"

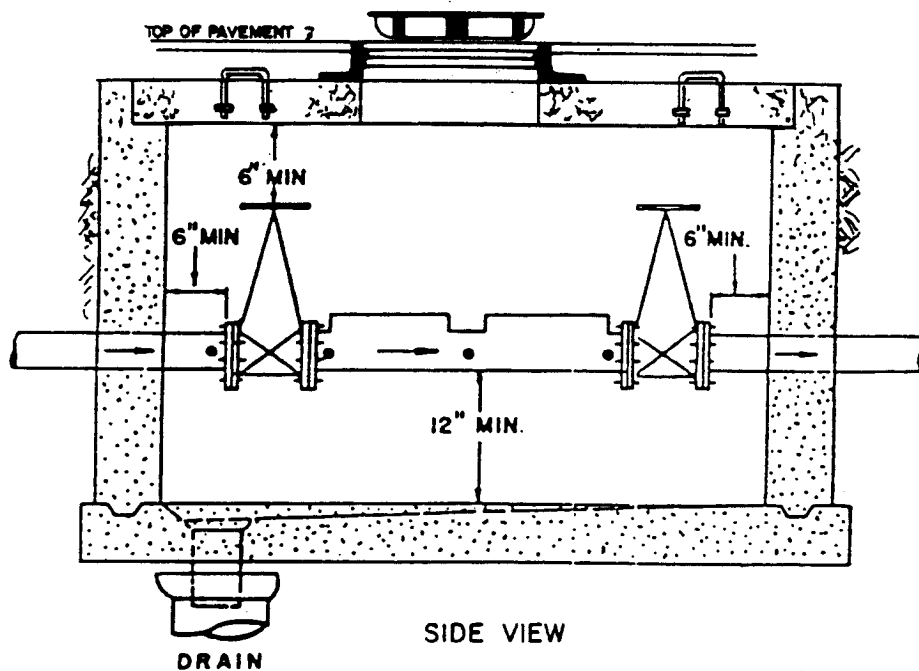

SIDE VIEW

CITY OF CRIPPLE CREEK
WATER DEPARTMENT

INSTALLATION OF DOUBLE
CHECK VALVE ASSEMBLY BACK-
FLOW PREVENTER.