


### MECHANICAL JOINT CONNECTION

PIPE MUST BE CUT AT RIGHT ANGLES TO LONGITUDINAL CENTER-LINE IN ALL CASES.

PIPE ENDS SHALL BE FREE FROM BURRS.

MORTAR LINING SHALL BE FLUSH WITH PIPE END.

GOUGES CUT IN PIPE ENDS SHALL NOT BE ALLOWED.

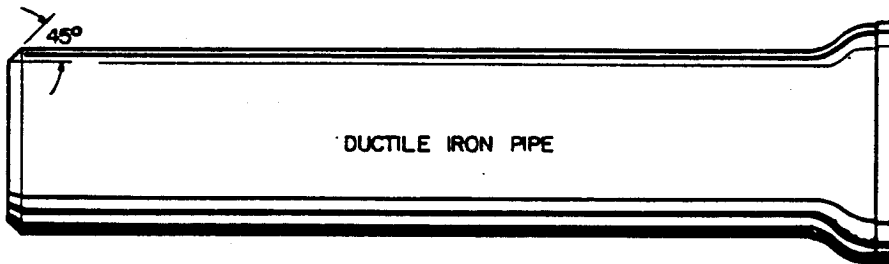

### SLIP JOINT CONNECTION

PIPE CUT IN STRAIGHT LINE AND BEVELED AT 45° ANGLE ON END.

### GENERAL NOTES

- 1) ALL PIPE CUTTING EQUIPMENT AND PIPE CUTS MUST BE APPROVED BY THE CITY OF CRIPPLE CREEK DEPT. OF PUBLIC WORKS INSPECTOR.
- 2) ALL PIPE ENDS TO BE USED IN INSTALLATION WILL BE DRESSED SMOOTH TO THE SATISFACTION OF THE INSPECTOR PRIOR TO INSTALLATION.

**CITY OF CRIPPLE CREEK  
WATER DEPARTMENT**

**PIPE CUTTING**

DRAWN L. OTTO	DATE 8/83	BY C	DATE
APPROVED	DATE	SHEET 17	SCALE NONE
JOB NO	JOB D. NO		
REVISION			
REVISION			16